



ADATTATORE MASCHIO/MASCHIO CON GUARNIZIONE INCASSATA

Filetto Gas Cilindrico

ADAPTOR MALE/MALE WITH CAPTIVE SEAL

Thread BSP Parallel

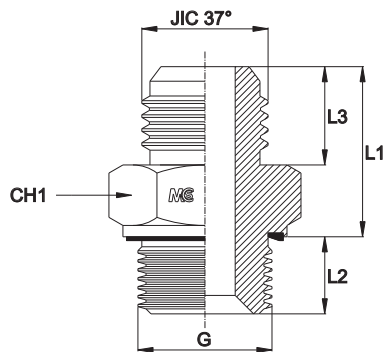

Serie Series	Bar W.P.	Codice Code	Ø Est. Tubo M Tube O.D. M	Ø Est. Tubo W Tube O.D. W	JIC 37°	G	L1	L2	L3	CH1
UNIVERSALE UNIVERSAL	350	JBSPMA0702V	6	1/4"	7/16"-20	1/8"	22,50	8,0	14,0	14
		JBSPMA0704V	6	1/4"	7/16"-20	1/4"	22,50	11,0	14,0	19
		JBSPMA0706V	6	1/4"	7/16"-20	3/8"	23,50	12,0	14,0	22
		JBSPMA0708V	6	1/4"	7/16"-20	1/2"	23,50	14,0	14,0	27
		JBSPMA0802V	8	5/16"	1/2"-20	1/8"	22,50	8,0	14,0	14
		JBSPMA0804V	8	5/16"	1/2"-20	1/4"	22,50	11,0	14,0	19
		JBSPMA0806V	8	5/16"	1/2"-20	3/8"	23,50	12,0	14,0	22
		JBSPMA0808V	8	5/16"	1/2"-20	1/2"	23,50	14,0	14,0	27
		JBSPMA0902V	10	3/8"	9/16"-18	1/8"	23,40	8,0	14,1	17
		JBSPMA0904V	10	3/8"	9/16"-18	1/4"	23,40	11,0	14,1	19
		JBSPMA0906V	10	3/8"	9/16"-18	3/8"	23,60	12,0	14,1	22
		JBSPMA0908V	10	3/8"	9/16"-18	1/2"	23,60	14,0	14,1	27
		JBSPMA1204V	12	1/2"	3/4"-16	1/4"	25,80	12,0	16,7	22
		JBSPMA1206V	12	1/2"	3/4"-16	3/8"	26,20	12,0	16,7	22
		JBSPMA1208V	12	1/2"	3/4"-16	1/2"	26,20	14,0	16,7	27
	JBSPMA1212V	12	1/2"	3/4"-16	3/4"	27,70	16,0	16,7	32	
	JBSPMA1406V	14-15-16	5/8"	7/8"-14	3/8"	30,20	12,0	19,3	24	
	JBSPMA1408V	14-15-16	5/8"	7/8"-14	1/2"	30,20	14,0	19,3	27	
	JBSPMA1412V	14-15-16	5/8"	7/8"-14	3/4"	30,70	16,0	19,3	32	
	JBSPMA1416V	14-15-16	5/8"	7/8"-14	1"	32,30	19,0	19,3	41	
	JBSPMA1706V	18-20	3/4"	1"1/16-12	3/8"	34,60	12,0	21,9	30	
	JBSPMA1708V	18-20	3/4"	1"1/16-12	1/2"	34,60	14,0	21,9	30	
	JBSPMA1712V	18-20	3/4"	1"1/16-12	3/4"	35,10	16,0	21,9	32	
	JBSPMA1716V	18-20	3/4"	1"1/16-12	1"	35,10	19,0	21,9	41	
	JBSPMA1720V	18-20	3/4"	1"1/16-12	1"1/4	35,10	20,0	21,9	50	
	JBSPMA2112V	25	1"	1"5/16-12	3/4"	35,90	16,0	23,1	36	
	JBSPMA2116V	25	1"	1"5/16-12	1"	36,10	19,0	23,1	41	
	JBSPMA2120V	25	1"	1"5/16-12	1"1/4	36,10	20,0	23,1	50	
	JBSPMA2124V	25	1"	1"5/16-12	1"1/2	37,60	20,0	23,1	55	
	JBSPMA2616V	28-30-32	1"1/4	1"5/8-12	1"	39,20	19,0	24,3	46	
	JBSPMA2620V	28-30-32	1"1/4	1"5/8-12	1"1/4	39,20	20,0	24,3	50	
	JBSPMA2624V	28-30-32	1"1/4	1"5/8-12	1"1/2	39,20	20,0	24,3	55	
	JBSPMA2632V	28-30-32	1"1/4	1"5/8-12	2"	39,80	24,5	24,3	70	
JBSPMA3016V	35-38	1"1/2	1"7/8-12	1"	44,50	19,0	27,5	50		
JBSPMA3020V	35-38	1"1/2	1"7/8-12	1"1/4	44,50	20,0	27,5	50		
JBSPMA3024V	35-38	1"1/2	1"7/8-12	1"1/2	44,50	20,0	27,5	55		
JBSPMA3032V	35-38	1"1/2	1"7/8-12	2"	44,50	24,5	27,5	70		
105	JBSPMA4032V	50	2"	2"1/2-12	2"	49,50	24,5	33,9	70	